

TRIPO-SCOPE® M1


650-100

PRODUCT MANUAL

TABLE OF CONTENTS

INTRODUCTION	
Reference Guide	3
Overview	4
Physical Characteristics	4
FEATURES	
Leveling Leg Extensions and Level Bubble	5
Anchor Strap	5
ACCESSORIES	
Puck Adaptor (included)	8
Mount Clamps (not included)	8
Horizontal Right Angle Mount (not included)	8
DEPLOYING THE TRIPO-SCOPE® M1	6–7
MAINTENANCE	8
WARRANTY	10–11
CONTACT FOXFURY	11

TRIPO-SCOPE® M1 REFERENCE GUIDE

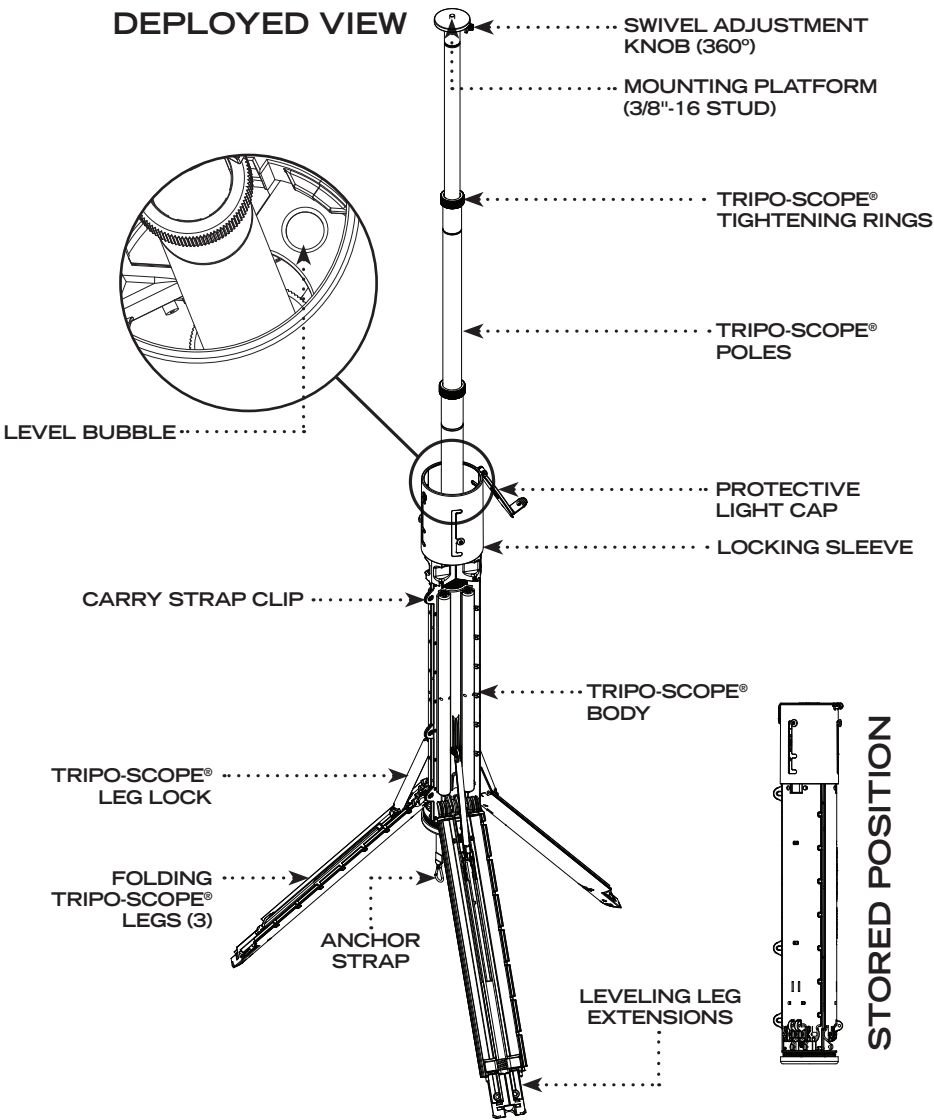

ALSO INCLUDED

- Carry Strap
- Puck Adaptor

OVERVIEW



The Tripo-Scope® M1 (Patent Pending) is the ultimate telescoping tripod that reaches great heights [up to 92" (2,336 mm)] while providing a sturdy base. With combined use of the included Puck Adaptor, any Nomad® Now, N32 or N56 can be mounted on the Tripo-Scope® M1. Stack up to three (3) of the Nows to fill the area with light as needed via the Mounting Platform (3/8"-16 Stud). The Tripo-Scope® M1 can be set up in 20 seconds and stows as a 29.5" tube that fits in most places.

PHYSICAL CHARACTERISTICS

Please read below before using the Tripo-Scope® M1 as it relays beneficial operating and safety information.

TRIPO-SCOPE® M1	
DIMENSIONS	29.5 x 4.6 in (749.3 x 117 mm) WHEN STORED
WEIGHT	12.7 lbs (5.7 kg)


WARNINGS

-  DO NOT mount equipment on the Tripo-Scope® M1 that exceeds 22 lbs.
-  DO NOT mount or hang heavy objects off center of the Mounting Platform, as this may cause the Tripo-Scope® M1 to tip over.

FEATURES


LEVELING LEG EXTENSIONS AND LEVEL BUBBLE

On uneven ground, fine adjustments can be made by releasing the Leveling Leg Extensions. The Level Bubble can be used for reference.

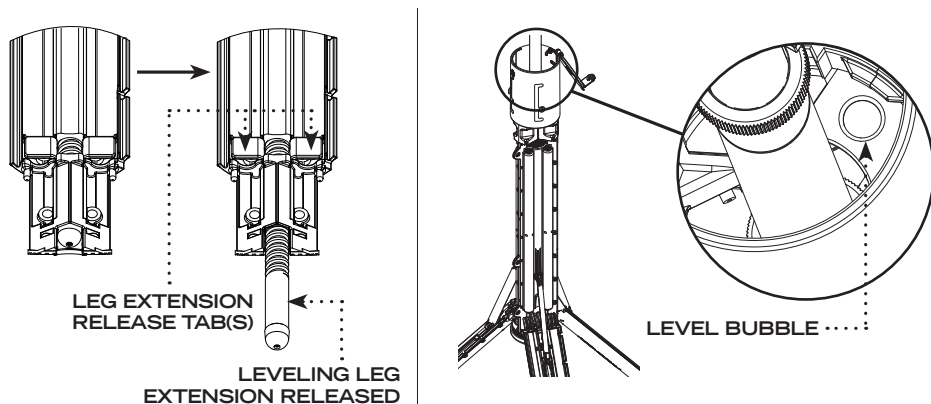



ANCHOR STRAP

In case of heavy wind or extreme weather conditions, attach a sand bag, or equivalent weight, to the concealed Anchor Strap (see the "Tripo-Scope® M1 Reference Guide" on pg. 3 for location).

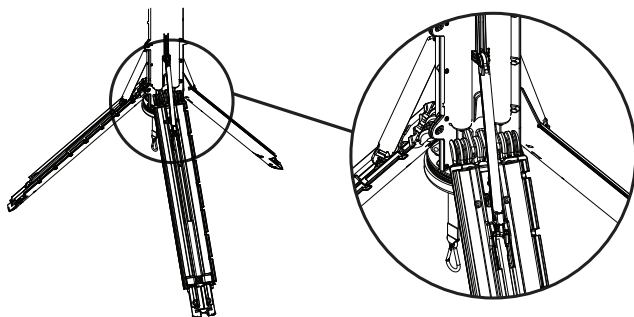

NOTE: The Anchor Strap retracts automatically. DO NOT let it retract back into the Tripo-Scope® M1 body without a D-Ring or Carabiner attached to it.

DEPLOYING THE TRIPO-SCOPE® M1

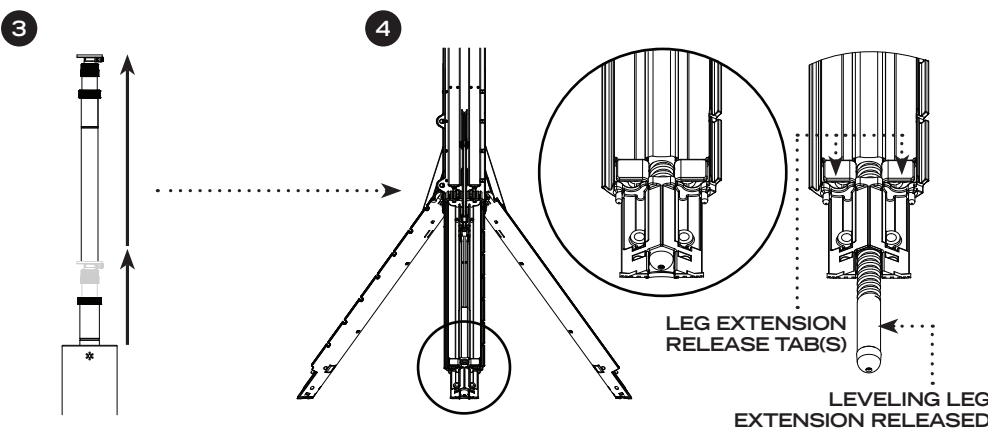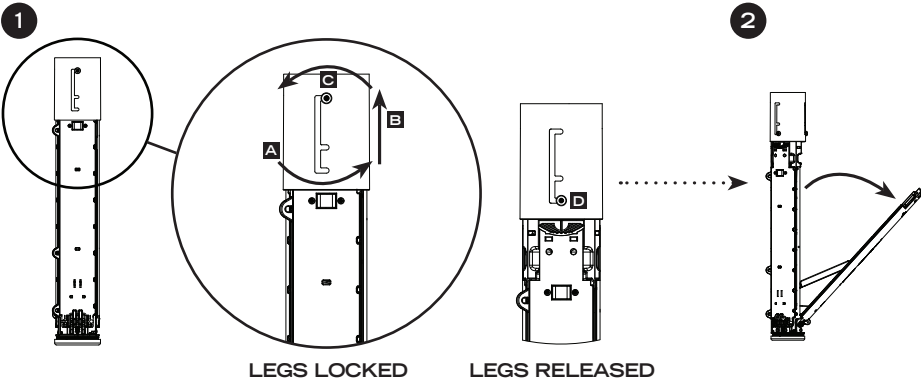

1. Set the Tripo-Scope® M1 down vertically, on a flat surface, as shown. Open the Protective Light Cap and twist the Locking Sleeve to the right (A) and slide upwards (B). While still holding the Locking Sleeve up, twist it back to the left (C). The Folding Tripo-scope® Legs are now accessible to deploy (D).
2. Unfold each Tripo-scope® Leg and make sure they are locked in place by the Leg Locks (see the "Tripo-scope® M1 Reference Guide" on pg. 3 for location).
3. Elevate the Mounting Platform to desired height by raising the Tripo-scope® Poles. Tighten the Tripo-scope® Tightening Rings (clockwise) to hold the poles at desired height.
 - ❖ **IMPORTANT:** To reposition, loosen the Tightening Rings, bring the Tripo-scope® Poles down again and turn the Mounting Platform OR physically pick up and move the position of the whole Tripo-scope® M1. **DO NOT TRY TO TURN THE TRIPO-SCOPE® POLES AGAINST EACH OTHER.** This can cause permanent damage.
4. On uneven ground, adjust each Tripo-Scope® Leg individually, as necessary. Lift the leg off the ground, and then, using both thumbs, press and hold both Leg Extension Release Tabs until the Leveling Leg Extensions (located at the end of each of the Tripo-Scope® Legs) are released. Retract the Leveling Leg Extensions in the same manner.
 - ❖ Fine adjustment can be made by turning the Leveling Leg Extension by hand. Use the Level Bubble (located inside the Locking Sleeve) for reference.
 - ❖ In case of heavy wind or extreme weather conditions, attach a sand bag, or equivalent weight, to the concealed Anchor Strap (see the "Tripo-Scope® M1 Reference Guide" on pg. 3 for location), and to the base of the legs as needed.

THE TRIPO-SCOPE® M1 IS NOW READY FOR USE!

TRIPO-SCOPE® ACCESSORIES

PUCK ADAPTOR (INCLUDED)

The Puck Adaptor mounts to the Tripo-Scope® M1. Thread the hole of the Puck Adaptor onto the 3/8"-16 Threaded Stud of the Tripo-Scope® M1. Then, twist the the Puck Adaptor until it is securely fastened.



MOUNT CLAMPS (SET OF TWO (2) NOT INCLUDED)

These allow the Tripo-Scope® M1 to be mounted to any hard surface such as a tailgate or wall via #10 Bolts (not included).

HORIZONTAL RIGHT ANGLE MOUNT (NOT INCLUDED)

The Horizontal Right Angle Mount can be mounted to a Nomad® Now, N32 or N56 and then mounted on the Tripo-Scope® M1 using two (2) bolts. This allows the light to be mounted horizontally to the Tripo-Scope® M1 providing the ability to direct the Light Head 45° up or down.

MAINTENANCE

-  As needed, wash the Tripo-Scope® M1 using a soft washcloth, clean water and a mild soap. When done, pat dry with a soft cloth.
-  Then continue to put the Tripo-Scope® M1 back into stored position. Lower the Tripo-scope® Poles by untightening the Tripo-scope® Tightening Rings. Then, push the Platform back into the Locking Sleeve.

NOTES

[illegible]

WARRANTY AND OTHER INFORMATION

PRODUCT DURABILITY



CARE/CLEANING

Your FoxFury product is a professional tool. Regular maintenance and care of your light will maximize performance for you. As needed, wash your FoxFury product using a soft washcloth, clean water and a mild soap. Be sure that all parts are reassembled securely before washing. When done, pat dry with a damp cloth.

ADDITIONAL ACCESSORIES

- ❖ Nomad® Carry Strap, P/N 51-056
- ❖ Nomad® Mount Clamps (set of 2), P/N 850-800
- ❖ Nomad® Carrying Bag, P/N 850-200-800
- ❖ Accessories Bag, P/N 600-250
- ❖ 3M Reflective (Yellow) Safety Tape Strips (set of 3), P/N 70-125
- ❖ 3M Reflective (Yellow) Safety Stickers (set of 3), P/N 70-126

WARNINGS

FoxFury, LLC is not responsible for the incorrect use of any FoxFury Lighting product.

- ❖ FoxFury, LLC is not responsible for any injury or damage caused during the use of this product.
- ❖ Usage of this product must be supervised by an adult when it is being used by a minor.

❖ Any FoxFury product should be operated at speeds safe enough to maneuver around surrounding obstacles.

❖ Do not use under the influence of drugs or alcohol.

LIMITED LIFETIME WARRANTY

FoxFury, LLC ("FoxFury") warrants this product to be free from defects in material for a lifetime of use except for batteries, LEDs, abuse, and normal wear. We will repair or replace this product should we determine it to be defective. This limited lifetime warranty excludes rechargeable batteries, chargers, switches, and electronics, which have a 2-year warranty with proof of purchase.

This limited lifetime warranty is given only to the original end user of the accompanying product. If you purchased a product from someone other than an authorized FoxFury reseller/distributor or if the product was used, (including but not limited to demo models, show models or refurbished product by someone other than FoxFury) prior to your purchase, you are not the Original Purchaser and the product that you purchased is not covered by this warranty. This limited warranty is VOID if this Product has been altered or modified in any way (including but not limited to attempted warranty repair without authorization from FoxFury and/or alteration/removal of the serial number). To expedite warranty concerns, we encourage the end user to register their FoxFury Product at www.foxfury.com/pages/warranty-registration.

THIS IS THE ONLY WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES ARE EXPRESSLY DISCLAIMED EXCEPT WHERE SUCH LIMITATION IS PROHIBITED BY LAW.

You may have other specific legal rights which vary by jurisdiction. Go to www.foxfury.com/pages/warranty for a complete copy of the warranty. Retain your receipt for proof of purchase.

CONTACT FOXFURY

FoxFury, LLC

Oceanside, CA 92056 USA

Toll-Free: 844-FOXFURY

Tel: 760.945.4231

Fax: 760.433.3650

Email: service@FoxFury.com

Web: FoxFury.com

All FoxFury products are designed in Oceanside, CA. All FoxFury products are manufactured with the highest quality USA and foreign parts. Products are assembled in either FoxFury's controlled plant in Asia or the USA, under strict quality control.

