




T.E.D.D. REFERENCE GUIDE

TACTICAL ELECTRONIC DISTRACTION DEVICE

750-500 | 750-940

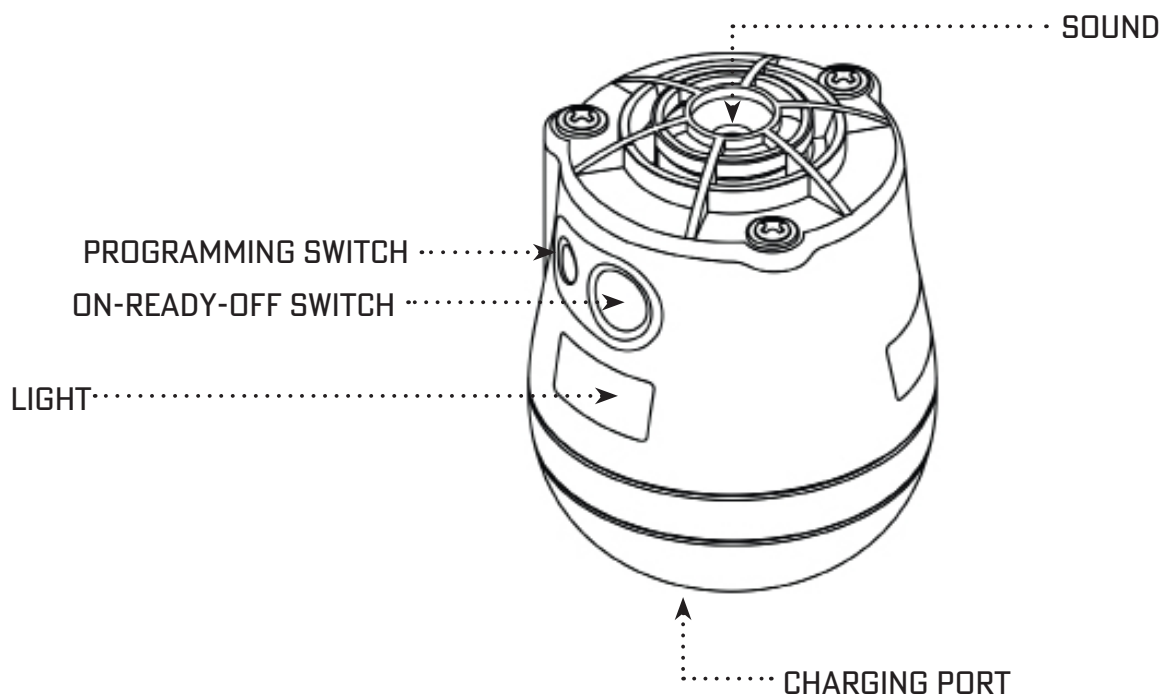

TO BE OPERATED BY TRAINED PERSONNEL ONLY

T.E.D.D. IS NOT INTENDED TO BE USED AS A WEAPON, LAUNCHED OR THROWN LIKE A ROCK. IT IS MEANT TO CAUSE MAXIMUM DISRUPTION WITH MINIMAL DAMAGE. AVOID STRIKING PEOPLE OR ANIMALS WITH IT.

- LIGHT: 2,600 LUMEN (P/N 750-500), 6W (P/N 750-940)
- LED: 360° HORIZONTALLY, AND 110° VERTICALLY (+80° -30°)
- SOUND: 120 DB (AT 1 M) 3KHZ
- SUBMERSIBLE TO 10 FT (3.3 M)
- SHOCK RESISTANT / IMPACT RESISTANT 12 FT (3.7 M)
- RECHARGEABLE

MEETS REQUIREMENTS OF NFPA 1971-8.6 (2013)

(844) 369-3878

1255 E. VISTA WAY, #326, VISTA, CA 92084 USA
INFO@TACSWAN.COM | WWW.TACSWAN.COM

OVERVIEW

- EIGHT (8) PROGRAMMABLE LIGHT AND SOUND MODES
- FOUR (4) PROGRAMMABLE ACTIVATION DELAYS
- ON-READY-OFF SWITCH
- PROGRAMMING SWITCH (SMALL, RECESSED) - USE A SMALL TOOL LIKE A PEN, PENCIL, OR HANDCUFF KEY TO ACTIVATE

TO TURN ON: UNIT MUST BE READIED BY PRESSING ON-READY-OFF SWITCH, WHICH LIGHTS UP GREEN (P/N 750-500)/ IR (P/N 750-940). WHEN READY TO DEPLOY, PRESS SWITCH AGAIN, AND THE GREEN/IR LIGHT WILL START BLINKING, INDICATING THAT THE PROGRAMMED ACTIVATION DELAY HAS BEGUN.

TO TURN OFF: PRESSING THE SAME SWITCH ONCE MORE. THE GREEN/IR LIGHT GOES OFF.

NOTE: UNIT IS SHIPPED IN MODE 8 (SAFETY LOCK). IF NO RESPONSE, PROGRAM UNIT AS SPECIFIED IN THE NEXT SECTION.

PROGRAMMING

LIGHT & SOUND PROGRAMMED BY PRESSING RECESSED PROGRAMMING SWITCH WHILE THE ON-READY-OFF SWITCH IS IN OFF MODE. AUDIBLE SOUND PROVIDES FEEDBACK. THIS PROGRAMMING MUST BE ENTERED WITHIN 4 SECONDS.

PRESS ONCE:	TURBO STROBE AND SOUND: 2 SEC., THEN STOP
PRESS TWICE:	TURBO STROBE AND SOUND: 10 SEC. ON, 30 SEC. OFF, THEN REPEAT
PRESS 3 TIMES:	LIGHT AND SOUND: 2 SEC., THEN STOP
PRESS 4 TIMES:	LIGHT AND SOUND: 10 SEC. ON, 30 SEC. OFF, THEN REPEAT
PRESS 5 TIMES:	TURBO STROBE: 2 SEC., THEN STOP
PRESS 6 TIMES:	LIGHT ON CONTINUOUS (MUST BE TURNED OFF BY USER)
PRESS 7 TIMES:	SOUND: 2 SEC., THEN STOP
PRESS 8 TIMES:	SAFETY LOCK




NOTE: MODES ARE RETAINED IN MEMORY.

ACTIVATION DELAY MODES. PROGRAMMED BY PRESSING PROGRAMMING SWITCH WHILE THE UNIT IS READY (STEADY GREEN/IR LIGHT). AUDIBLE SOUND PROVIDES FEEDBACK. THIS PROGRAMMING MUST BE ENTERED WITHIN 2 SECONDS.




PRESS 1 TIME	2 SECONDS
PRESS 2 TIMES	4 SECONDS
PRESS 3 TIMES	7 SECONDS
PRESS 4 TIMES	10 SECONDS

ONCE THE UNIT IS ACTIVATED, IT GOES THROUGH A REPETITIVE CYCLE WITH THE TIMES SHOWN ABOVE. TO TURN IT OFF, SIMPLY PRESS THE ON-READY-OFF SWITCH.




DURABILITY

-  STEEL BASE, HIGH TEMPERATURE POLYCARBONATE SIDE, NYLON TOP COVER
-  IMPACT RESISTANT 12 FT (3.7 M) ONTO CONCRETE
-  SUBMERSIBLE TO 10 FT (3.3 M)

BATTERY

-  DEVICE AUTONOMY: 60 MINUTES CONTINUOUS LIGHT & SOUND
-  BATTERY LI-ION RECHARGEABLE PACK (BUILT IN). CHARGE TIME 1.5 HOURS
-  BATTERY LIFE: 500 FULL RECHARGES TO 70% OF BATTERY LIFE
100-240VAC 50/60 HZ, 12.6VDC, 0.6A

DIMENSIONS & WEIGHT

-  2.5 IN / 63 MM LARGEST DIAMETER
-  3.4 IN / 82 MM HEIGHT
-  WEIGHT: 1.1 LBS (490 G)