

SCOUT J SERIES PRODUCT MANUAL


Please read below before using your Scout as it relays beneficial operating and safety information for all models.

P/N	NAME	CASE COLOR
301-010	Scout JBK White LED Clip Light	Black
301-004	Scout JBK White & Red LED Clip Light	Black
302-010	Scout JOR White LED Clip Light	Orange
302-004	Scout JOR White & Red LED Clip Light	Orange
301-312	Scout 470nm Blue Forensic Light System	Black
301-313	Scout 495nm Cyan Forensic Light System	Black
301-314	Scout 525nm Green Forensic Light System	Black

BATTERIES

- ❖ The Scout Series requires three (3) AA batteries.
- ❖ Acceptable battery types: Alkaline (recommended) or Rechargeable (1.5V-1.7V)
- ❖ Mixing of new and used, or different brand batteries is not recommended as this could lead to leakage or explosion.

BATTERY INSTALLATION & REPLACEMENT

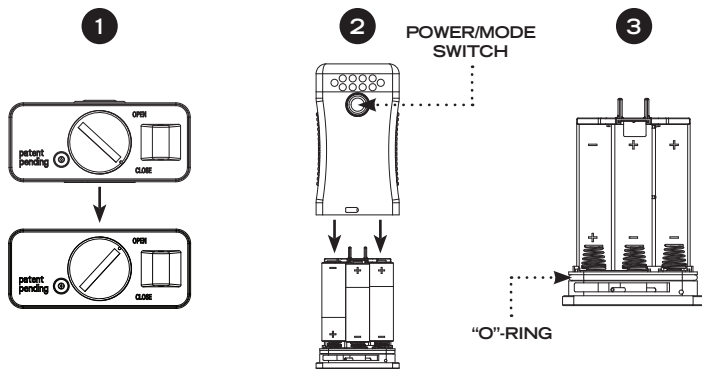

1. On the Battery Holder, turn the locking mechanism to the "Open" position (using a coin or large flat screwdriver to do this may help).
2. Pull the Battery Holder away from the Light Body.
 - ❖ In order to overcome the seal you may want to use a large flat screwdriver to help separate the Battery Holder from the Light Body, as the seal is rather tight, especially for the first use.
3. Install batteries inside the Battery Holder following polarity markings.

NOTE: Remove the plastic tab from inside the Battery Holder before use.

4. Reinsert the Battery Holder into the Light Body.

5. Turn the Locking Mechanism back to the "Close" position.
6. Test the Scout's performance by activating the Power/ Mode Switch, located at the upper middle portion of the front face of the Light Body (just below the LEDs).

NOTE: Inspect the "O"-Ring (located near the base of the Battery Holder) every time you replace batteries. The "O"-Ring is necessary to create a water seal.

- ❖ Do not leave batteries in the Battery Pack for periods longer than three (3) months without use.
- ❖ Be sure to check the Battery Pack every month for battery corrosion.

NOTE: Corrosion from leaking batteries is **NOT** covered by the warranty.

BATTERY LIFE

P/N 301-010 & 302-010

BATTERY LIFE	MODE
12 HOURS	HIGH
50 HOURS	LOW

*Battery life may vary according to mode selected, battery quality and prevailing ambient conditions.

P/N 301-004, 302-004

BATTERY LIFE	MODE
12 HOURS	ALL LEDS
20 HOURS	WHITE LEDS ONLY
50 HOURS	RED LEDS ONLY
60 HOURS	ALTERNATING FLASH

P/N 301-312, 301-313, & 301-314

BATTERY LIFE	MODE
12 HOURS	ON

OPERATIONAL MODES

FOR P/N 301-010 & 302-010:

- ❖ LOW mode: 1 click, outer 2 LEDs ON
- ❖ ALL LEDs: 2 clicks, all 10 LEDs ON

FOR P/N 301-004 & 302-004:

- ❖ RED LEDs ONLY: 1 click, bottom 4 red LEDs ON
- ❖ WHITE LEDs ONLY: 2 clicks, top 6 white LEDs ON
- ❖ ALTERNATING FLASH mode: 3 clicks, alternating white & red LEDs
- ❖ ALL LEDs: 4 clicks, all 10 LEDs ON

FOR P/N 301-312, 301-313, & 301-314:

- ❖ ALL LEDs: 1 click

NOTE: Once all LEDs are ON, power the Scout OFF by clicking the Power/Mode Switch once. Then repeat steps for desired mode.

PRODUCT DURABILITY



The Scout only becomes 100% WATERPROOF if the "O"-Ring is installed. Meets Requirements of NFPA 1971-8.6 (2013).

CARE/CLEANING

Your FoxFury product is a professional tool, but regular maintenance and care of your light will maximize performance for you. As needed, wash your FoxFury product using a soft washcloth, clean water and a mild soap. Be sure that the Battery Pack is SEALED before washing. When done, pat dry with a damp cloth. Yearly, use a silicone-based lubricant on the "O"-Ring to prevent cracking and to maintain the WATERPROOF seal.

WARNINGS

FoxFury, LLC is not responsible for the incorrect use of any FoxFury Lighting product.

- ❖ Lights are strong enough to cause damage to the human eye.
- ❖ Do not stare into LEDs for long periods of time or from a close range (less than 2 ft).
- ❖ FoxFury, LLC is not responsible for any injury or damage caused during the use of this product.
- ❖ Usage of this product must be supervised by an adult when it is being used by a minor.
- ❖ Any FoxFury product should be operated at speeds safe enough to maneuver around surrounding obstacles.
- ❖ Do not use under the influence of drugs or alcohol.

LIMITED LIFETIME WARRANTY

FoxFury, LLC ("FoxFury") warrants this product to be free from defects in material for a lifetime of use except for batteries, LEDs, abuse, and normal wear. We will repair or replace this product should we determine it to be defective. This limited lifetime warranty excludes rechargeable

batteries, chargers, switches, and electronics, which have a 2-year warranty with proof of purchase.

This limited lifetime warranty is given only to the original end user of the accompanying product. If you purchased a product from someone other than an authorized FoxFury reseller/distributor or if the product was used, (including but not limited to demo models, show models or refurbished product by someone other than FoxFury) prior to your purchase, you are not the Original Purchaser and the product that you purchased is not covered by this warranty. This limited warranty is VOID if this Product has been altered or modified in any way (including but not limited to attempted warranty repair without authorization from FoxFury and/or alteration/removal of the serial number). To expedite warranty concerns, we encourage the end user to register their FoxFury Product at www.foxfury.com/pages/warranty-registration.

THIS IS THE ONLY WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES ARE EXPRESSLY DISCLAIMED EXCEPT WHERE SUCH LIMITATION IS PROHIBITED BY LAW.

You may have other specific legal rights which vary by jurisdiction. Go to www.foxfury.com/pages/warranty for a complete copy of the warranty. Retain your receipt for proof of purchase.

CONTACT FOXFURY

FoxFury, LLC
Oceanside, CA 92056 USA
Toll-Free: 844-FOXFURY
Tel: 760.945.4231
Fax: 760.433.3650
Email: service@FoxFury.com
Web: FoxFury.com

All FoxFury products are designed in Oceanside, CA. All FoxFury products are manufactured with the highest quality USA and foreign parts. Products are assembled in either FoxFury's controlled plant in Asia or the USA, under strict quality control.